

Calconduit™

Rigid Conduit, Rigid & EMT Fittings

EMT Special Radius 45° Sweeps

Application:

EMT elbows are to be installed on conduit raceways for the interconnection of conduit runs and other fittings.

Features:


Fabricated from UL Listed Electrical Metallic Tubing (EMT)

Certifications and Compliances:

- UL & CUL Listed
- UL File Number E315441
- UL797 with statements of conformance
- ANSI C80.3
- National Electrical Code® 2008 -Article 358
- A.R.R.A. Available
- Federal Specification WW-C-563*

Options:

Available in any degree of bend from 5° to 90°, and special radius

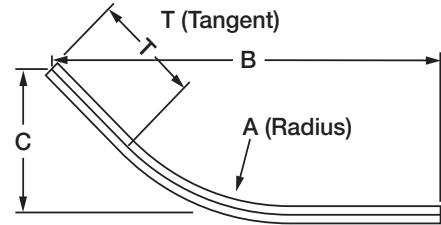

12"						
Radius						
A	12 Inch					
Size	Item Number	B	C	T	Wt.	
½"	EM0512SW45	24	10	10	0.80	
¾"	EM0712SW45	24	10	10	1.10	
1"	EM1012SW45	24	10	10	1.50	
1-¼"	EM1212SW45	24	10	10	2.50	
1-½"	EM1512SW45	24	10	10	3.50	

EMT Sweeps meet UL797 and ANSI C80.3
Also available in 11-¼", 15", 22-½", 30" and 60°.

24" - 30" - 36"															
Radius															
A	24 Inch					30 Inch					36 Inch				
Size	Item Number	B	C	T	Wt.	Item No	B	C	T	Wt.	Item No	B	C	T	Wt.
½"	EM0524SW45	36	15	11	1.10	EM0530SW45	40	17	11	1.20	EM0536SW45	44	18.5	11	1.30
¾"	EM0724SW45	36	15	11	1.60	EM0730SW45	40	17	11	1.80	EM0736SW45	44	18.5	11	2.00
1"	EM1024SW45	36	15	11	2.70	EM1030SW45	40	17	11	2.90	EM1036SW45	44	18.5	11	2.60
1-¼"	EM1224SW45	36	15	11	3.70	EM1230SW45	40	17	11	4.20	EM1236SW45	44	18.5	11	4.10
1-½"	EM1524SW45	36	15	11	4.10	EM1530SW45	40	17	11	4.60	EM1536SW45	44	18.5	11	5.10
2"	EM2024SW45	36	15	11	5.10	EM2030SW45	40	17	11	5.90	EM2036SW45	44	18.5	11	5.90
2-½"	EM2524SW45	36	15	11	5.80	EM2530SW45	40	17	11	8.50	EM2536SW45	44	18.5	11	8.50
3"	EM3024SW45	36	15	11	8.80	EM3030SW45	40	17	11	9.50	EM3036SW45	44	18.5	11	10.20
3-½"	EM3524SW45	36	15	11	11.30	EM3530SW45	40	17	11	11.60	EM3536SW45	44	18.5	11	13.90
4"	EM4024SW45	36	15	11	13.00	EM4030SW45	40	17	11	15.60	EM4036SW45	44	18.5	11	16.00

Calconduit™

Rigid Conduit, Rigid & EMT Fittings

EMT Special Radius 45° Sweeps

48" - 60"										
Radius										
A	48 Inch					60 Inch				
Size	Item No	B	C	T	Wt.	Item No	B	C	T	Wt.
½"	EM0548SW45	54.5	22.5	12	1.60	EM0560SW45	62	26	12	1.80
¾"	EM0748SW45	54.5	22.5	12	2.40	EM0760SW45	62	26	12	2.70
1"	EM1048SW45	54.5	22.5	12	3.50	EM1060SW45	62	26	12	4.00
1-¼"	EM1248SW45	54.5	22.5	12	5.20	EM1260SW45	62	26	12	6.00
1-½"	EM1548SW45	54.5	22.5	12	6.00	EM1560SW45	62	26	12	6.90
2"	EM2048SW45	54.5	22.5	12	7.60	EM2060SW45	62	26	12	8.80
2-½"	EM2548SW45	54.5	22.5	12	11.10	EM2560SW45	62	26	12	12.70
3"	EM3048SW45	54.5	22.5	12	13.60	EM3060SW45	62	26	12	15.60
3-½"	EM3548SW45	54.5	22.5	12	18.00	EM3560SW45	62	26	12	20.60
4"	EM4048SW45	54.5	22.5	12	20.30	EM4060SW45	62	26	12	23.30